

# UFO Ballistic NailScrews® for Subfloor and Shear Wall

US Patents #9,291,183 B2, #10,865,824 B1, & Other Patents Pending / Cdn. Pat. [2,648,647]  
Fits most framing pneumatic or gas nailers on the market!



## 21° Plastic Strip


Size	Part #
2¼" X .113	HDNS214113YZSP
2½" X .113	HDNS212113YZSP
3" X .113	HDNS300113YZPH SP

## 34° Plastic Strip

Size	Part #
2¼" X .113	PSNS214113YZSP
3" X .113	PSNS300113YZSP

## 15° Wire Coil

Size	Part #
2¼" X .113	WCNS214113YZSP
2½" X .113	WCNS212113YZSP
3" X .113	WCNS300113YZSP

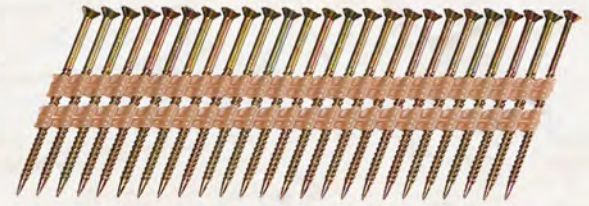

21° or 34° Plastic Strip



15° Wire Coil

Intertek Testing showed an average of 533 lbs. of pullout resistance for our 2¼" x .113 BNS and over 1,200 lbs. of shear strength. Substitute 2¼" X .113 YZ Ballistic NailScrews® for 8d common nails (2½" X .131) or collated screws. Use longer NailScrews® for applications fastening thicker materials.

Always use PPG1500™ or PT2000® coated Ballistic NailScrews® for Pressure Treated Lumber and exterior applications. These are code approved and available to ship today.



Watch the AdvanTech® installation video at [HowToNailScrew.com](http://HowToNailScrew.com)

**Patented ~ Tested ~ Approved™**

**UFO™**  
**Universal Fastener  
Outsourcing, LLC**


UER-0133  
**IAPMO  
ES**  
IBC & IRC Code Recognized

**800.352.0028**  
**479.443.9292**  
**NailScrews.com**


# The Difference is Clear

Data taken from a time study. 64 screws used per 4' X 8' OSB sheet per code installed (every 6" perimeter and 10" on center/field).

## Screw Installation of OSB Sheets per 8 Hour Day

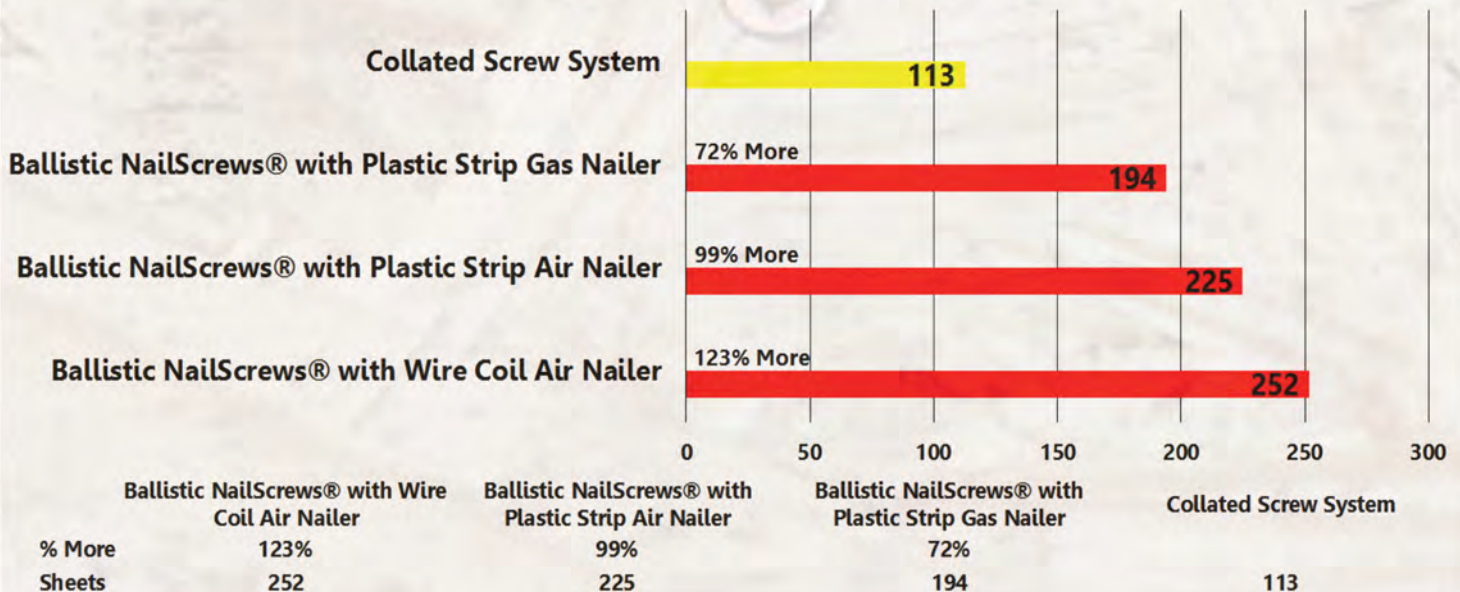

## Square Feet Installation in OSB per Code (64 Fasteners/Sheet) per 8 Hour Day

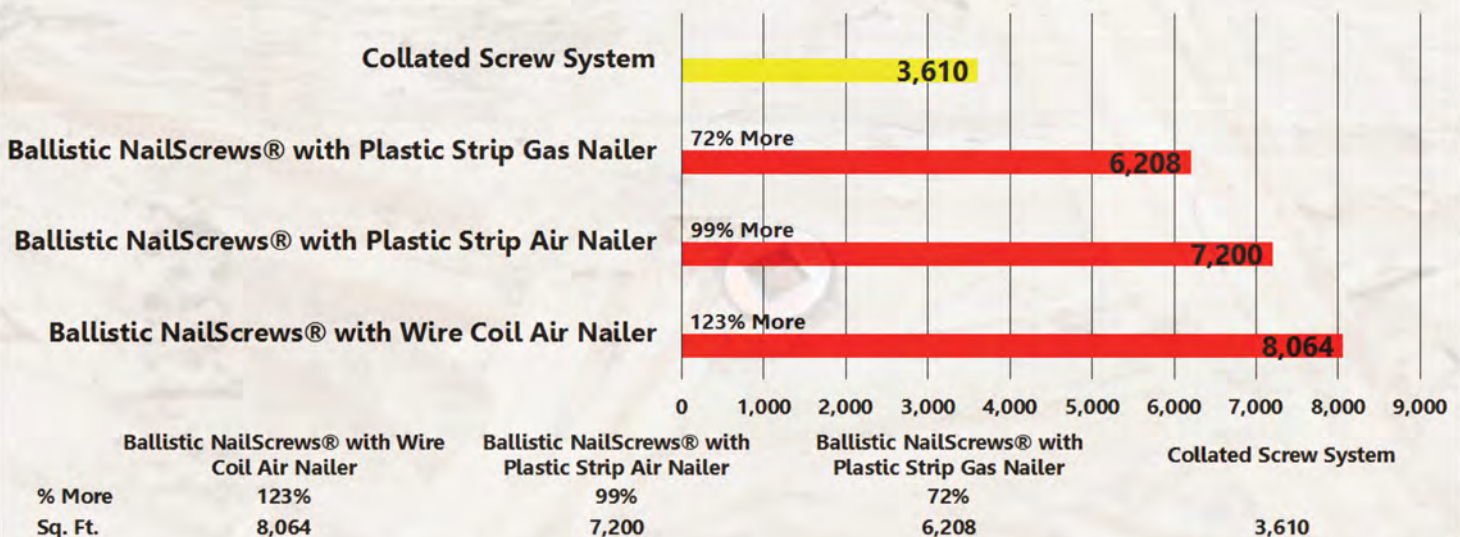

Best when done in a two to three person team where one is fastening while the others are putting on subfloor adhesive and placing the sheets.

# Quit Screwin' Around; Go Ballistic!™